Catalog No. 6900A-E



KGKJETHQ1000

This high-quality 600 dpi inkjet printer delivers simple, reliable printing at an affordable price.



http://www.kishugiken.co.jp/ew/

Simple Easy Beautiful

Announcing a feature-packed and affordable inkjet printer under the KGK brand



- High-quality 600 dpi inkjet printer at an affordable price
 - The printhead uses a 300-dot 600-dpi nozzle-integrated ink cartridge for high quality printing.
 - Allows for beautiful printing of not only dates and lot numbers, but QR codes, Data Matrix codes, and all kinds of barcodes.
- Newly-developed ink solves poor print quality issues occurring after downtime
- Traditional water-based ink often causes poor print quality (fragmented characters at the head of text strings) when the printer resumes printing after a pause for only a few minutes, resulting in product and ink loss. The printer uses a newly-developed ink that is able to significantly reduce this problem. A standard nozzle cap can be attached for further peace of mind when the printer will be down for a long period of time.



- The nozzle can be replaced along with the ink cartridge, so customers can quickly resolve nozzle problems.
- Cartridges are extremely simple and easy to replace. Cartridges can be replaced by anyone with a single operation, without even dirtying their hands.
- Extremely simple configuration and operation
- The 5.7-inch full color touch panel offers an easy-to-read screen layout and allows for intuitive operation.
- Complete with ink cartridge management functions
 - Ink cartridges feature onboard memory and are controlled through automatic computerized management. In addition to low ink management, these functions also prevent problems resulting from using old or unsuitable ink.



▲ Installing a cartridge

▲ Screen example

Printing sample Maximum print height 12.7 mm

The installation stand is optional

賞味期限2013.09.04

賞味期限 2014/08/30 製造日 2013/08/30



▲ Two-line printing



Specifications

HQ1000 Item Printing method Drop-on-demand heat-transfer printing system Max. supported line speed 30 m/minute (at 600 dpi) Nozzle arrangement 300 dots, 600 dpi Ink ejection direction Horizontal, downward 12.7 mm (maximum) Print height No. of heads Ink type Black: TK402 Substrate detection Photoelectric sensor No. of printable lines Four lines (maximum) No. of printable messages 1,000 messages (maximum) No. of modules per message 32 modules (maximum) No. of characters per module 256 characters (maximum) (for text module) Alphanumeric characters, symbols, hiragana, katakana, kanji Character type (JIS first/second) Character font TrueType fonts (Gothic, Mincho) Year (western/Japanese), month, date, time (12/24, minutes, Date/time printing seconds, day of week) Max. of 10 digits (up/down), repeat, increment value setting, Numbering zero suppression Barcode ITF, Code 39, NW-7, JAN, Code 128 QR, Data Matrix, PDF417 Two-dimensional code


Extended unit (optional)



The optional extended unit adds even more functions.


[I/O] Even more versatile than the standard I/O. [Encoder] Automatically tracks variations in conveyor belt speed.


[RS232C] Allows for serial communication with a PC or PLC.

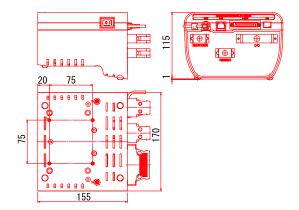

Dimensional drawing

Units are expressed in millimeters.

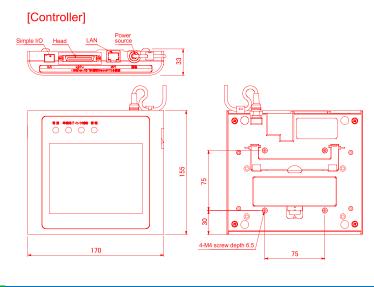

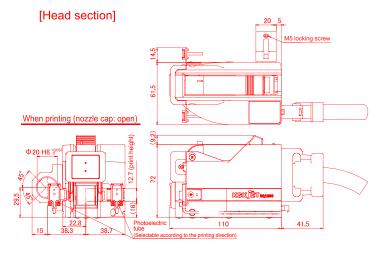

Product specifications may change without advance notice

TEL 022-748-1556

TEL 03-3624-2111





■ Sendai Sales Office

■ Tokyo Sales Office

■ Yokohama Sales Office

■ Kumagaya Sales Office

■ Shizuoka Sales Office

■ Nagoya Sales Office

■ Osaka Sales Office

■ Kobe Sales Office

■ Fukuoka Sales Office

■ Headquarters

36-1, Koriyama Shinbashi Minami, Taihaku-ku, Sendai-shi 3-41-13, Mukojima, Sumida-ku, Tokyo 3-20-12, Shinyokohama, Kohoku-ku, Yokohama-shi

852, Kamino, Kumagaya-shi, Saitama

2-1-10, Nishinakahara, Suruga-ku, Shizuoka-shi 3-96, Issha, Meito-ku, Nagoya-shi

10-35, Hiroshiba-cho, Suita-shi, Osaka 4-24-19, Manabigaoka, Tarumi-ku, Kobe-shi ■ Hiroshima Sales Office 2-17-2, Nakahiro-machi, Nishi-ku, Hiroshima-shi

1-3-14, Yutaka, Hakata-ku, Fukuoka-shi ■ Kainan Technical Center 1-1, Minami Akasaka, Kainan-shi, Wakayama 466, Nunohiki, Wakayama-shi

FAX 045-473-3140 TFI 045-478-0696 TEL 048-520-3110 FAX 048-527-8141 TEL 054-284-3526 FAX 054-284-3559 TEL 052-704-0505 FAX 052-709-1220 TEL 06-6330-6651 FAX 06-6378-1203 TFI 078-787-7477 FAX 078-783-1050 TEL 082-532-3300 FAX 082-231-6800 TEL 092-482-6303 FAX 092-477-3504 TEL 073-483-3141 FAX 073-484-2084 TEL 073-445-6610 FAX 073-448-2005

FAX 03-5608-7277